



EOS0615i-DUO3 LAYOUT and OPERATION FLOW CHARTS (v3.2 firmware version)

EOS0615i-DUO3 CHARGER LAYOUT

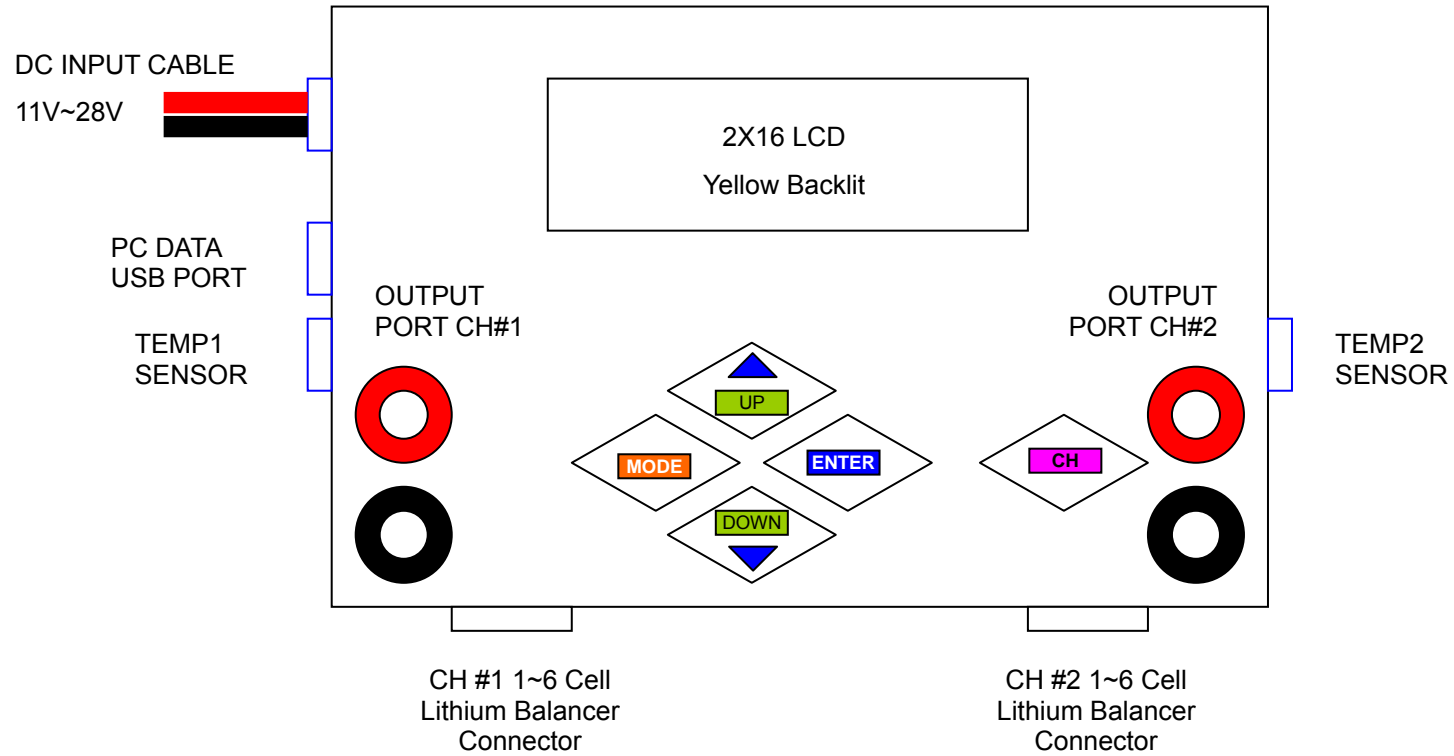


(1) MAIN MENU FLOW

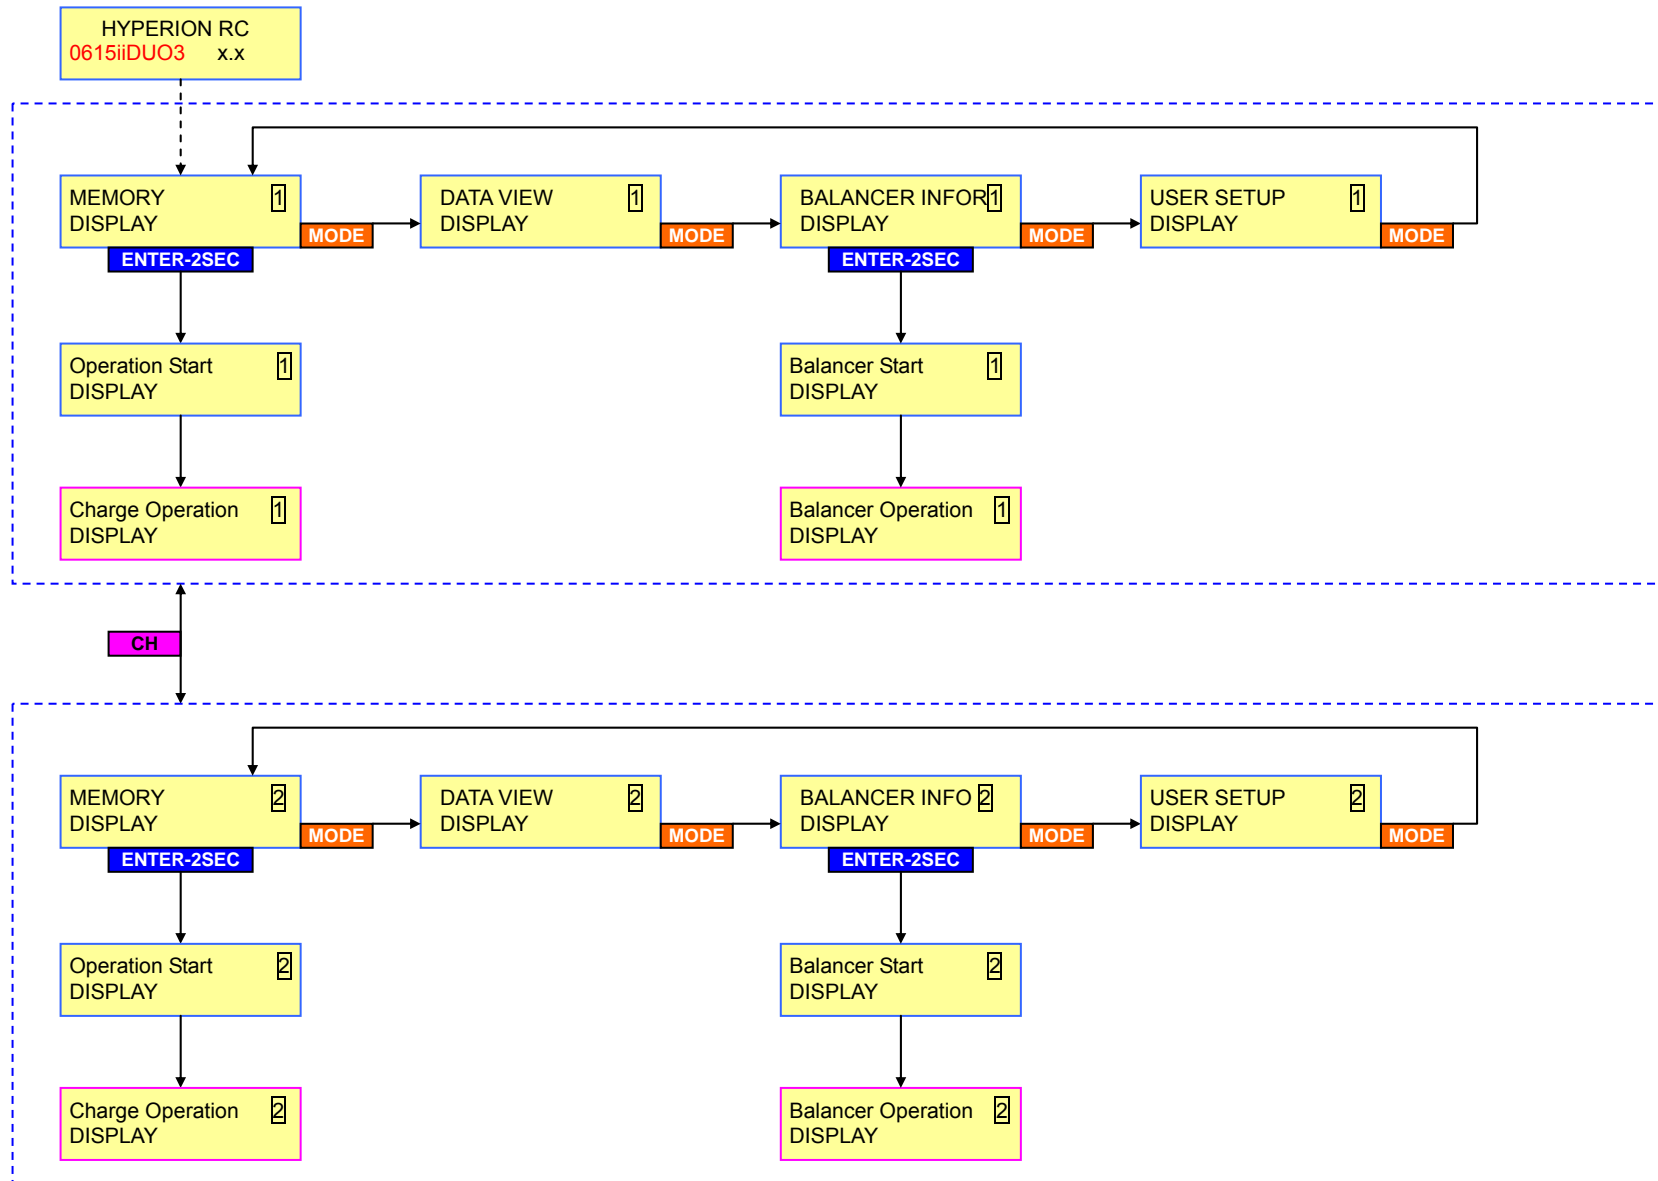


(2) **MEMORY DISPLAY** (settings available per each memory slot, depending on battery type)


LiIo/LiPo/LiFePO4 (a123)

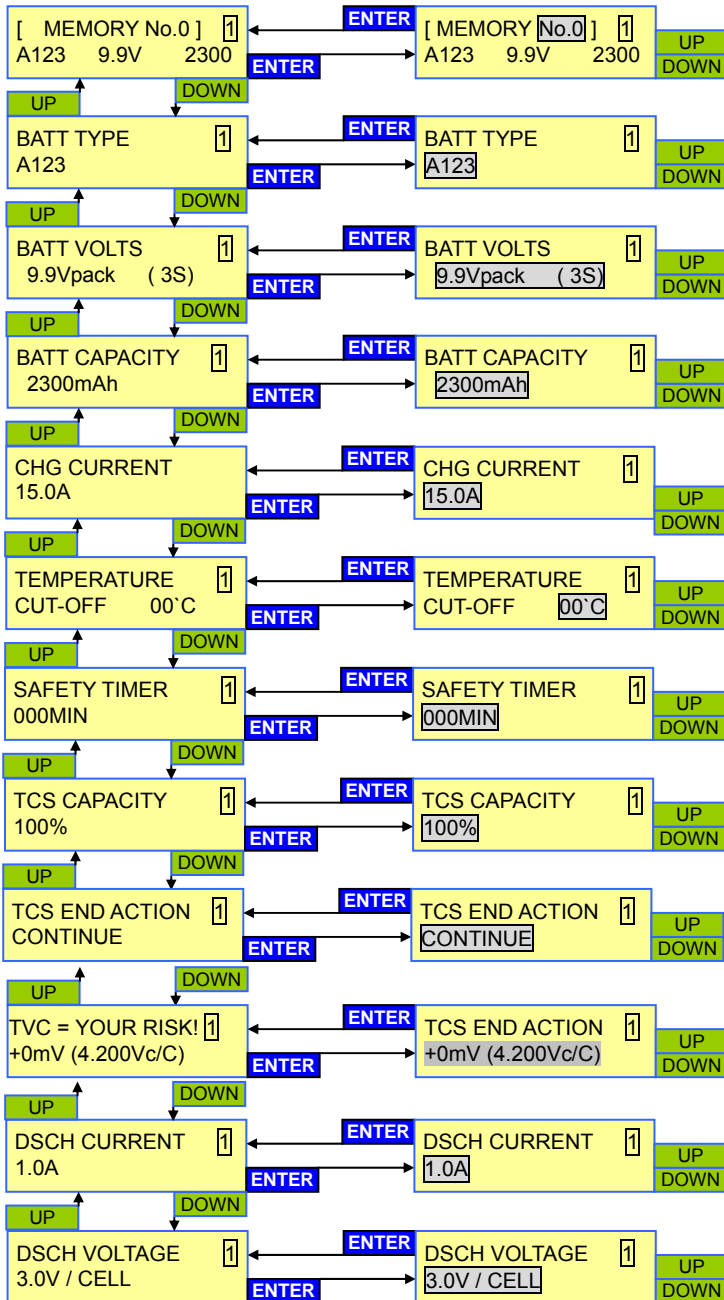

NiCd/NiMH

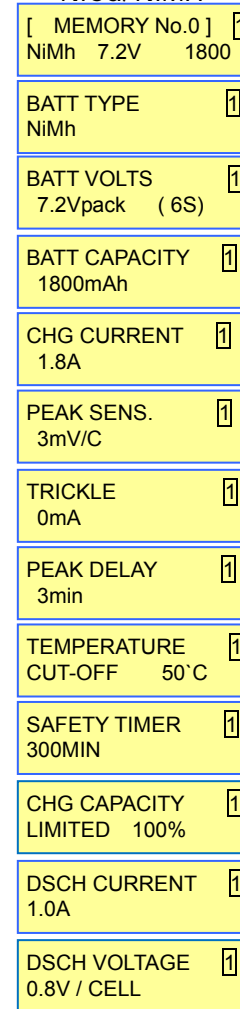


Pb

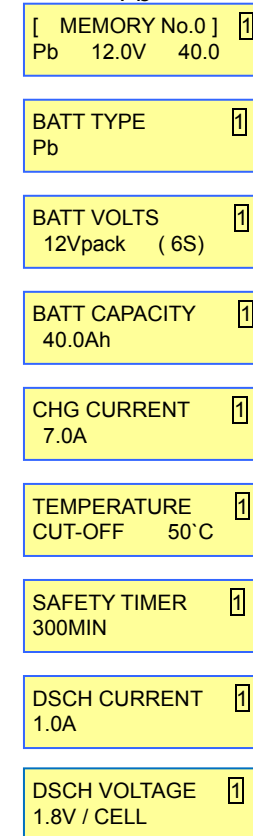


NOTE! NEVER CHANGE TVC SETTING UNLESS YOU ARE AN EXPERT USER, HAVE READ THE DETAILS ON PAGE 12, AND TAKE ALL RISK OF FIRE, DAMAGE, LOSS, or INJURY WHICH MAY RESULT

(3) DATA VIEW DISPLAY

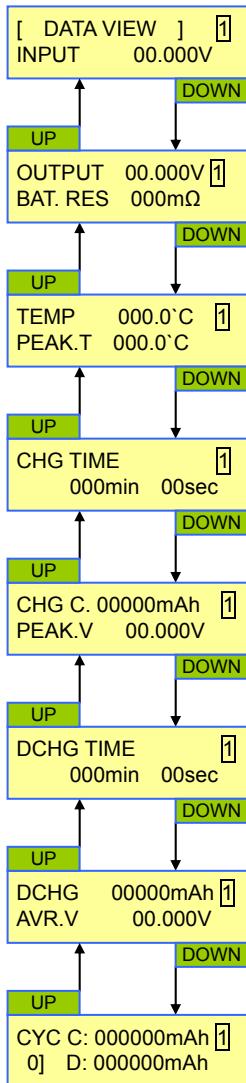

(4) BALANCE INFORMATION DISPLAY

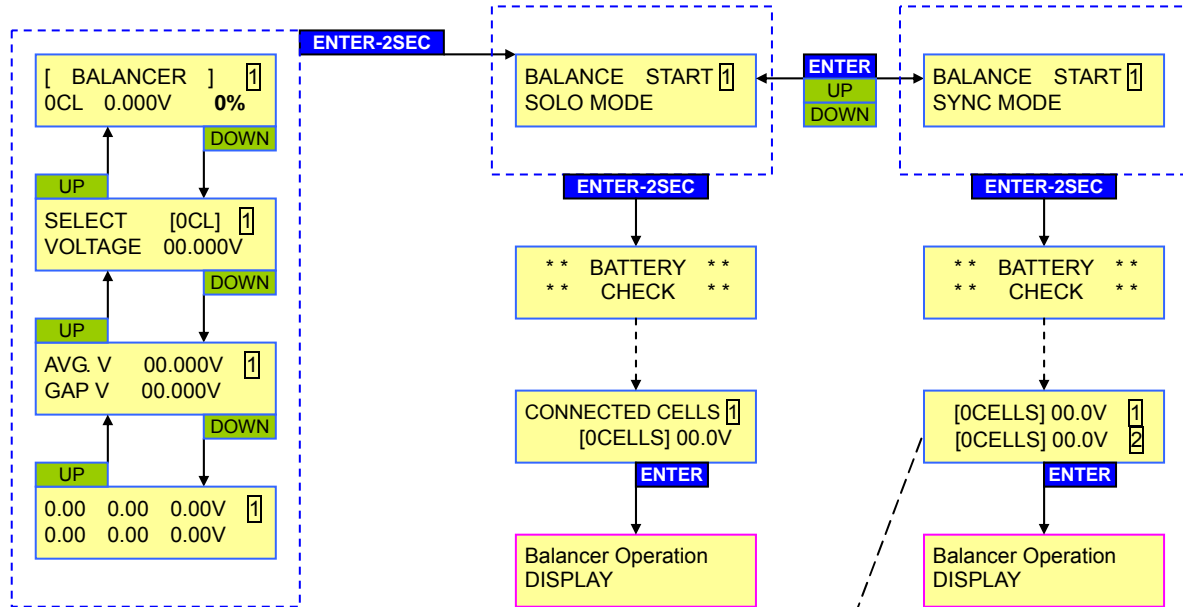


The 0% under [BALANCER] above indicates TCS% (capacity)


10-second AUTO Countdown. Starts charge after 10 seconds if user does not confirm cell count, only during Balance/Charge for Li- types.

(5) USER SETUP DISPLAY

CH#1 Global Settings

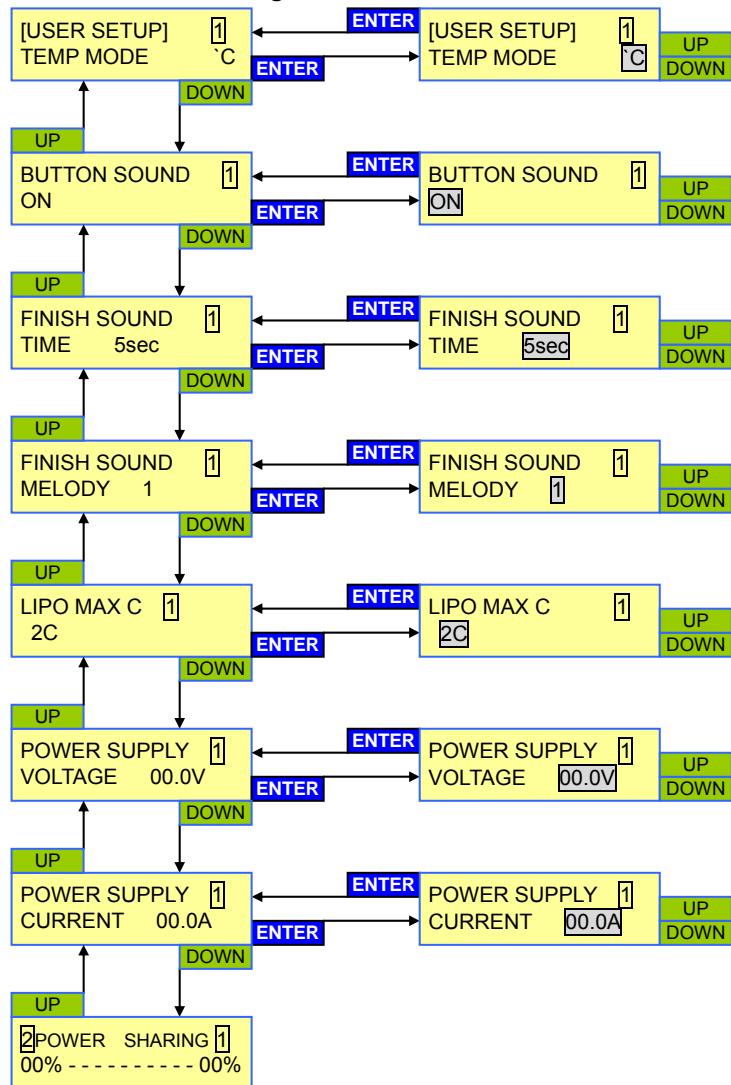

CH#2 Global Settings

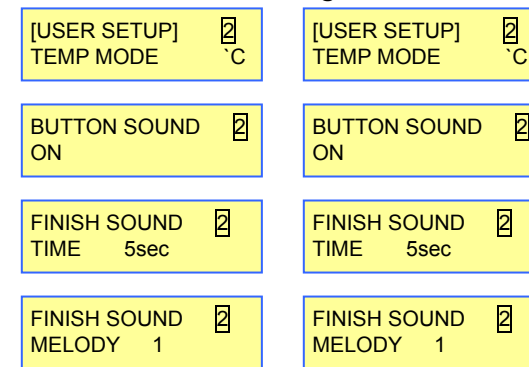


Lipo "Max C" is set to 2C by default. Select 1C to 5C as desired.


The **PS Load Control** settings above and **LIPO MAX C** are only found under CH#1 menu, but are effective for all memory positions on **both channels**.

OPERATIONS START – SETUP & DISPLAY


(6) NiCd / NiMH BATTERY START

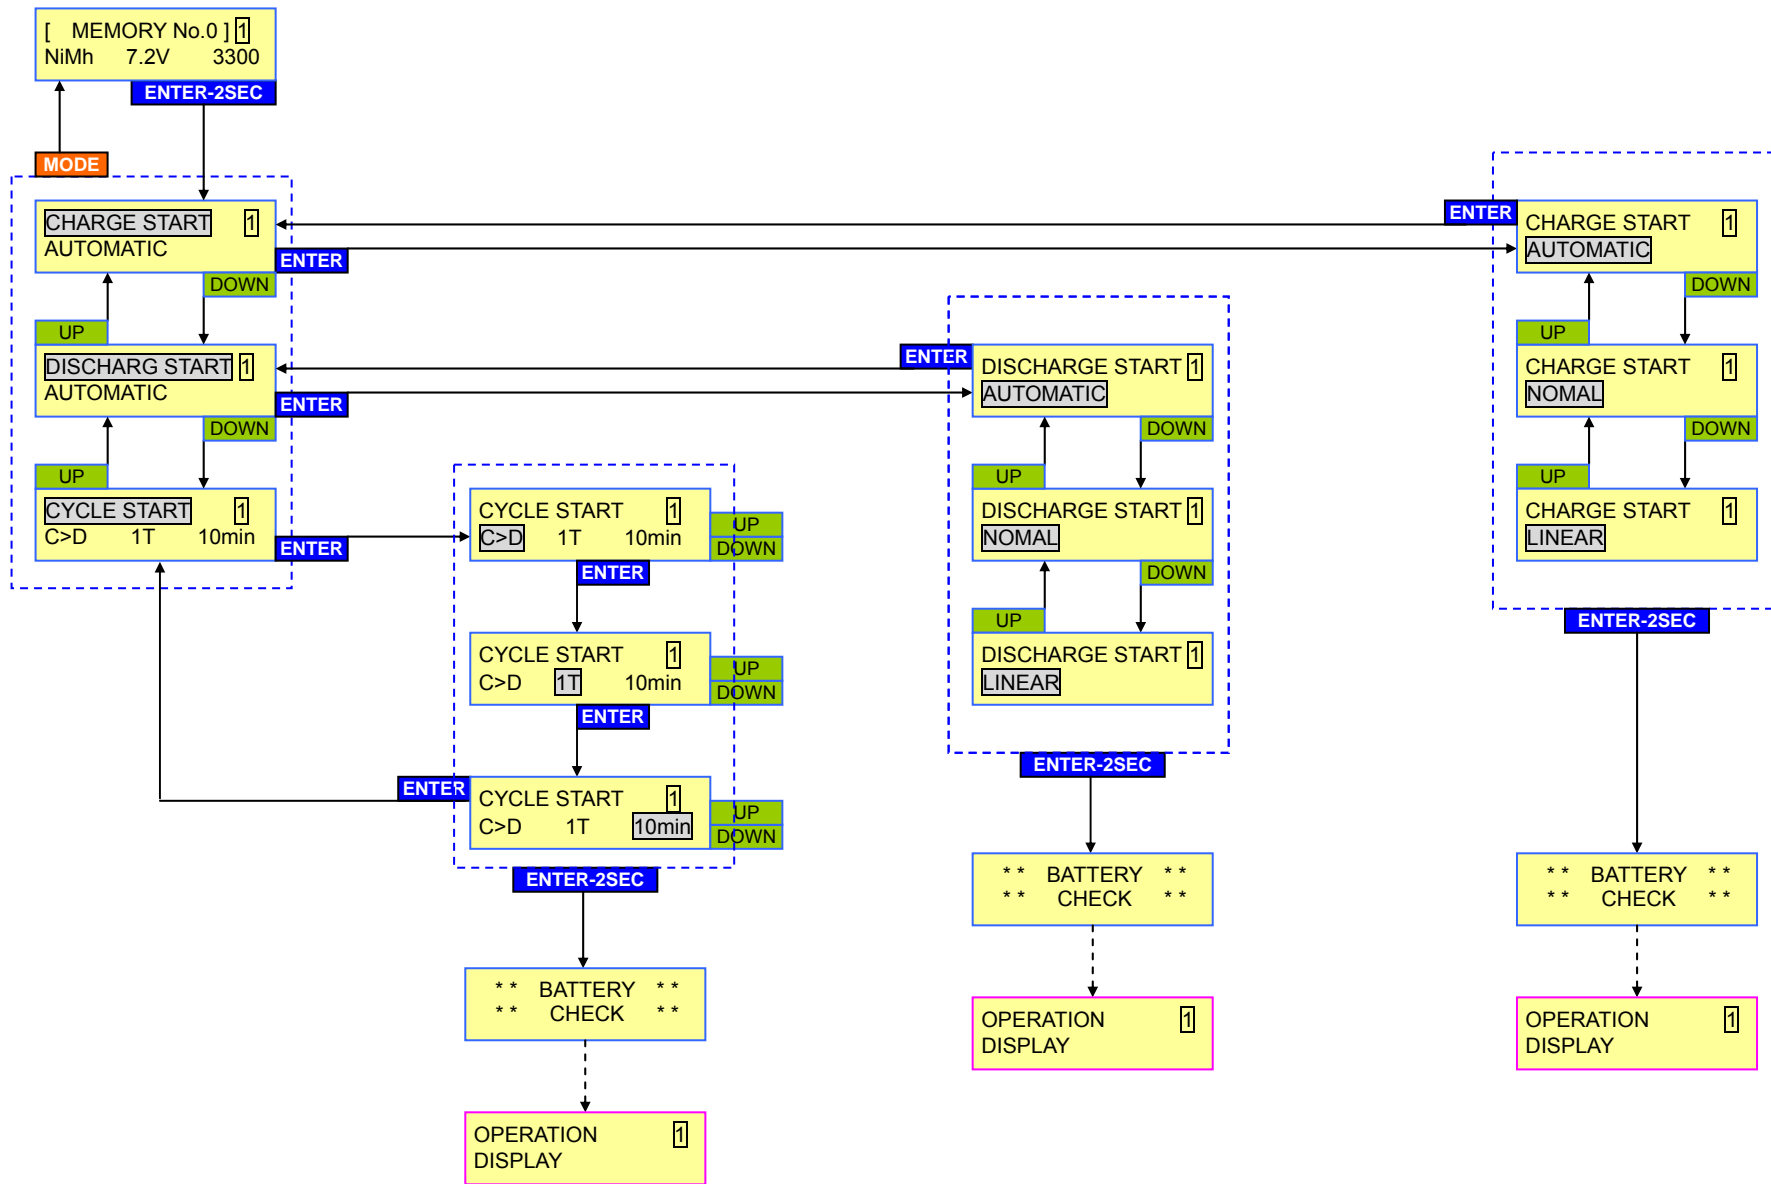

(7) LiIo / LiPo / A123(LIFE) BATTERY START

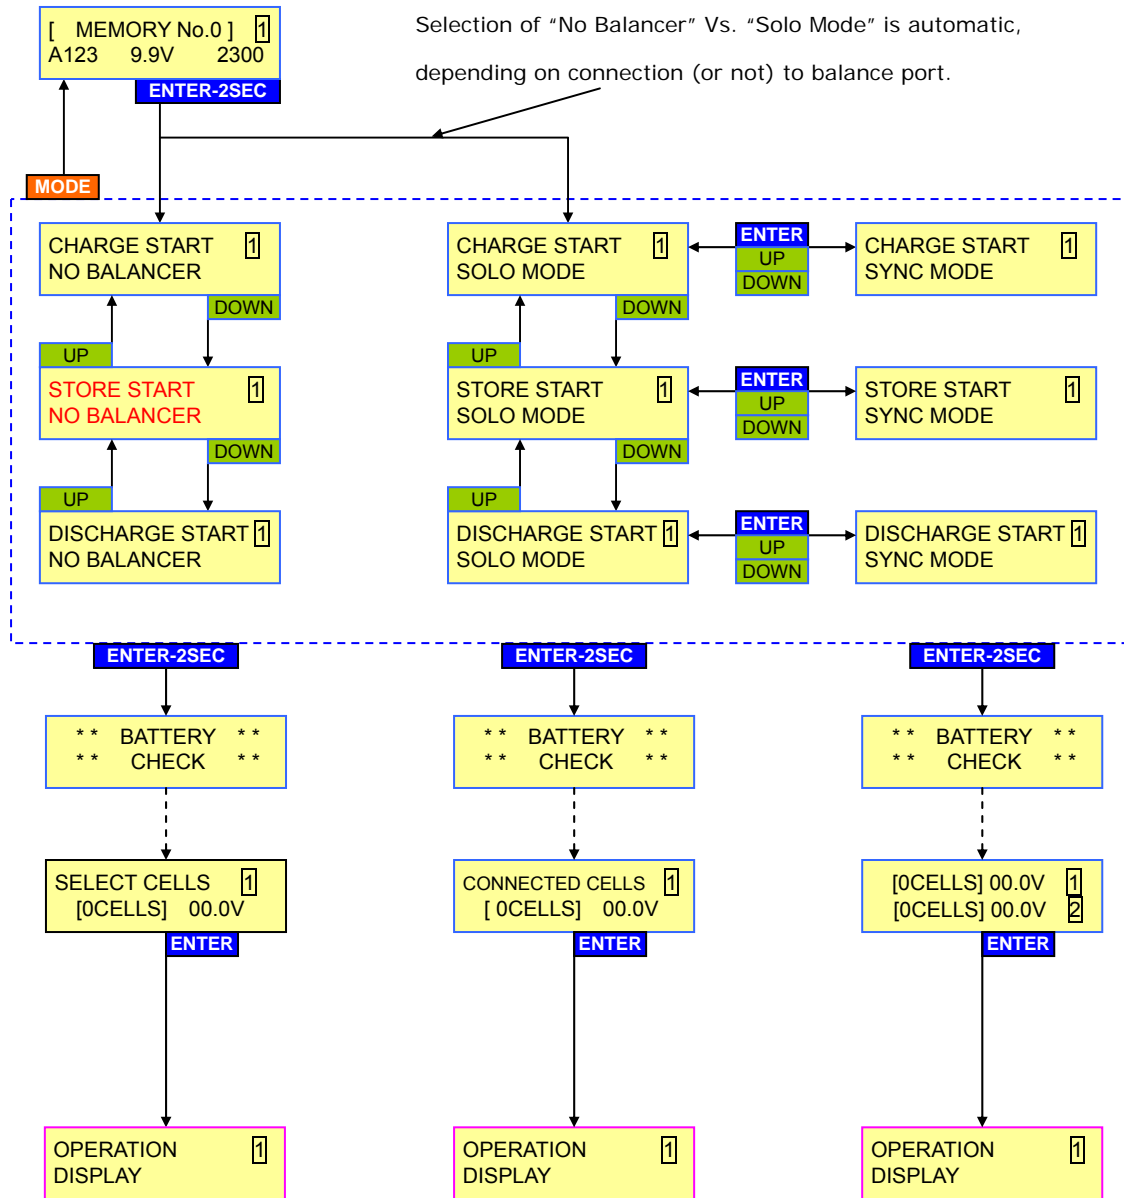


(8) PB BATTERY START

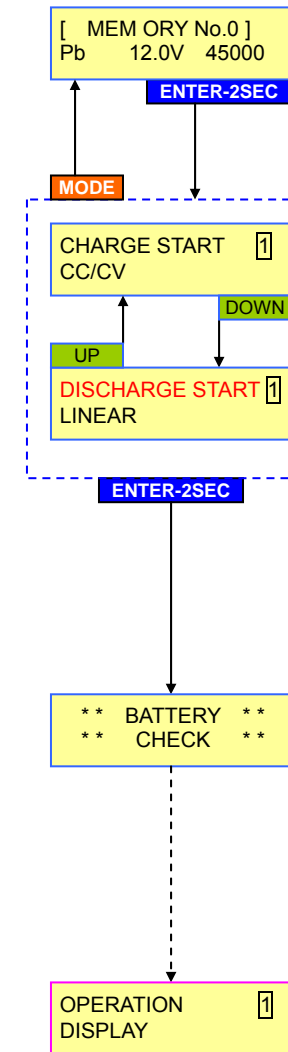


Note: STORE Mode only applies to LiIo, LiPo, and LiFePO4(a123) types. Balancer Connection is **required**. If Balancer is NOT connected OUTPUT BATTERY CONNECT ERROR


(9) OPERATION and FINISH DISPLAY

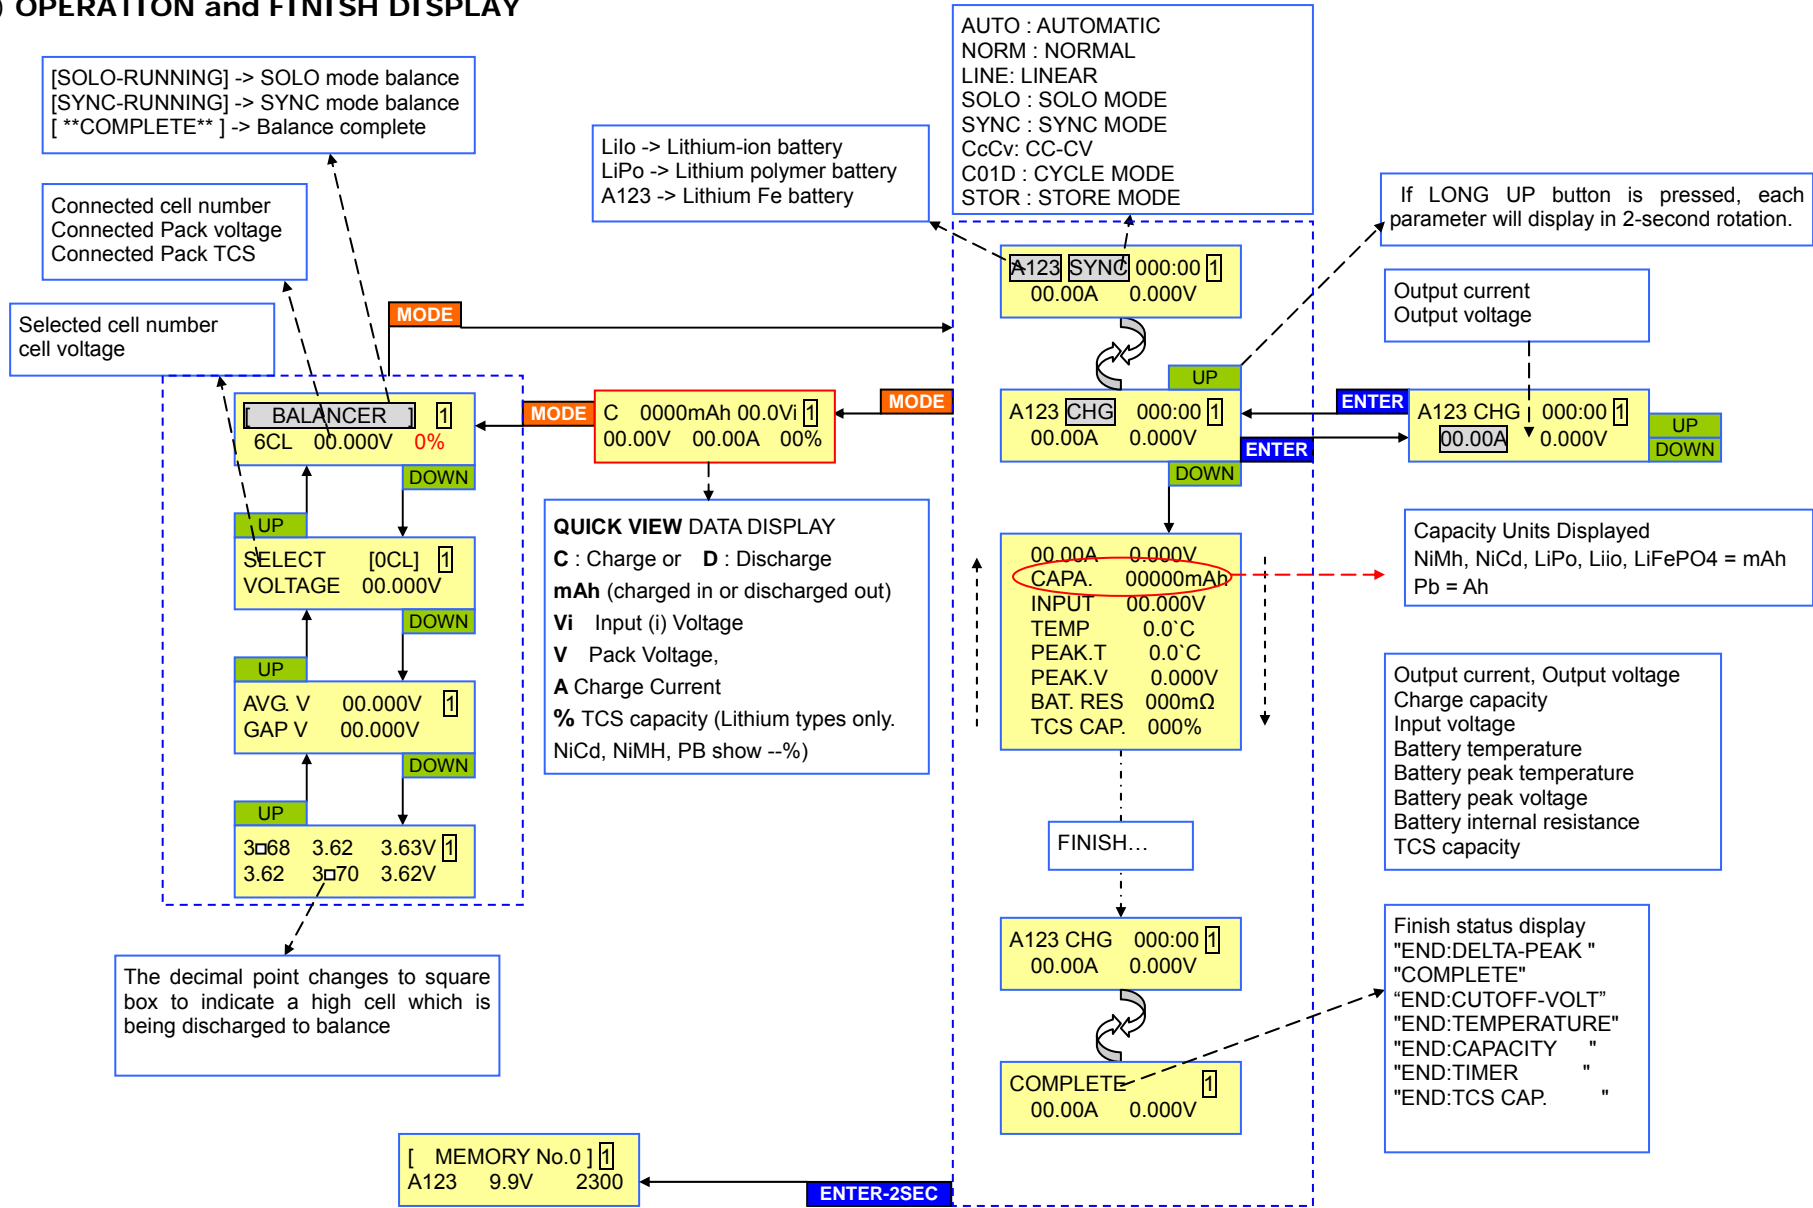

(10) LiIo / LiPo / LiFePO4 (a123) FINISH DISPLAY

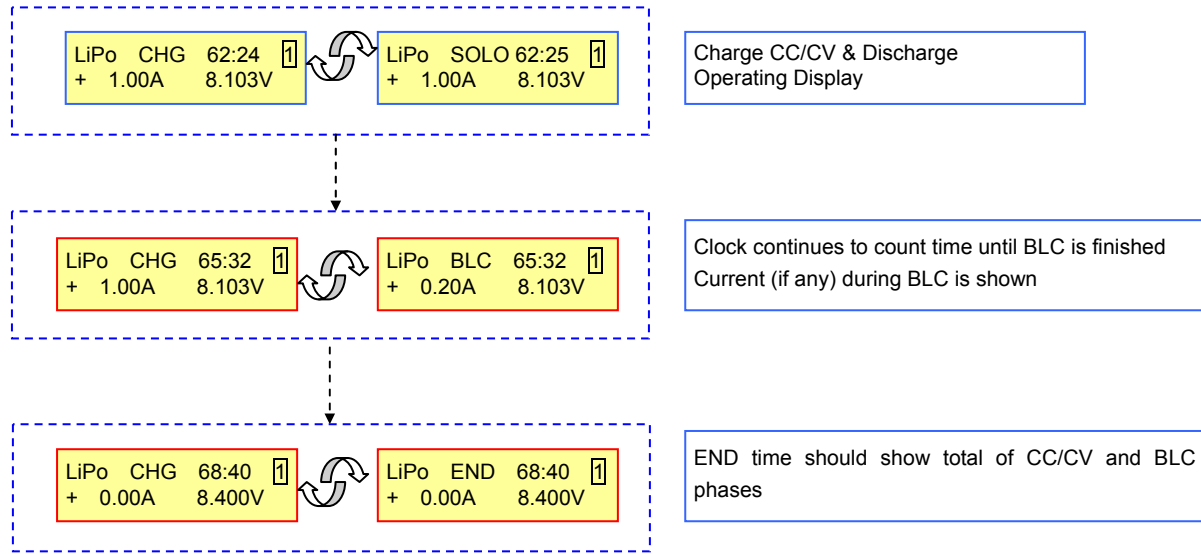


(11) NiCd/NiMH CYCLE OPERATION DISPLAY

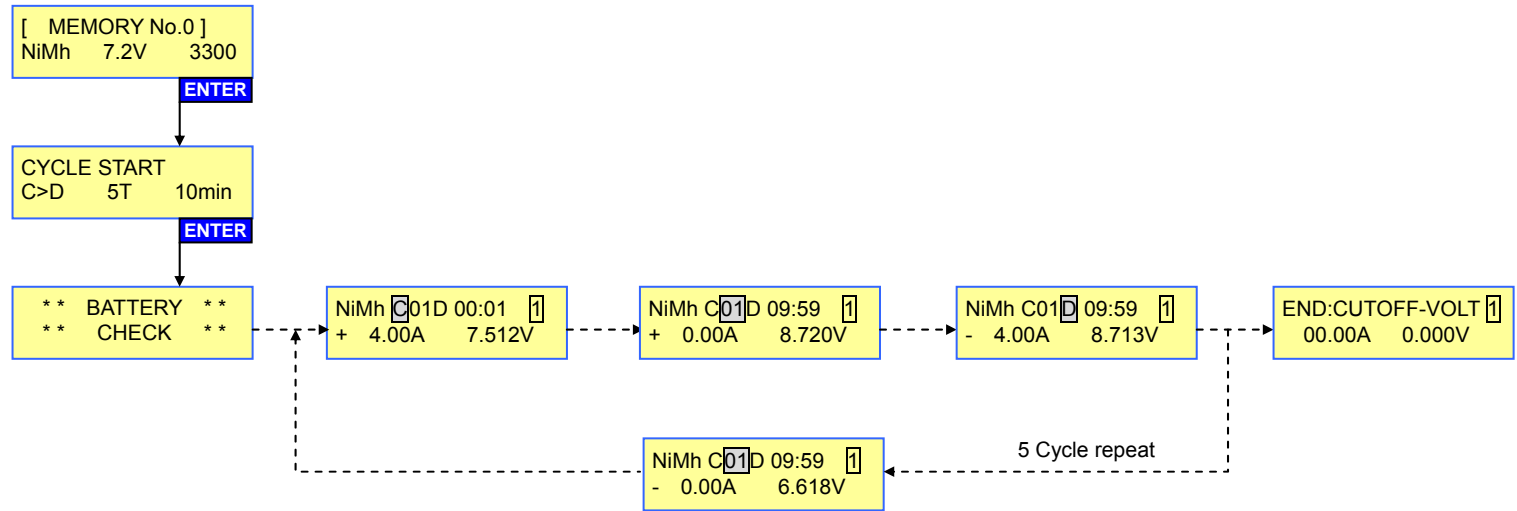

ERROR MESSAGES

INPUT VOLTAGE ERROR 0.00Vi	When input voltage is below 11.0V or exceeds 28V.
OUTPUT BATTERY CONNECT ERROR	When a battery is not connected to the charger's output
OUTPUT BATTERY REVERSE POLARITY	Output battery is connected to the output in reverse polarity (switch +/-)
OUTPUT BATTERY OPEN CIRCUIT	If the battery becomes disconnected during an operation
OUTPUT CIRCUIT ERROR	The output circuit of the charger has a problem. See troubleshooting above.
OUTPUT VOLTAGE TOO LOW 0.00V	Output voltage is lower than the selected cells or voltages (check battery specs and condition, or reset charger correctly)
OUTPUT VOLTAGE TOO HIGH 0.00V	Output voltage is higher than the selected cells or voltages.
TEMPERATURE SENSOR ERROR	The thermal probe is incorrectly connected, or the probe is damaged.
BATTERY TEMP TOO LOW 0.00V	The temperature of the battery is too low (below -10°C at idle mode and 0°C during operation, requires probe attached!).
BATTERY TEMP TOO HIGH	Battery temp is too high to be charged! (requires probe attached!)
INTERNAL TEMP TOO HIGH	When the temperature of the charger exceeds 125C. Reduce room temp, wait, restart.
BALANCE VOLTAGE CELL(0) TOO HIGH	When the balancing cell voltage is too high. Possible pack damage or connection error.
PAUSE... CHARGER TOO HOT	Charger temperature is too high. Charger will Pause until temp drops
SYNC COMMAND ERROR	Problem with wiring, connectors, or other. Clean and inspect as in Troubleshooting section for OUTPUT ERROR
FLAT CHECK	NiCd, NiMH only. Charger cannot detect DeltaV to terminate charge. See Troubleshooting section.

CONNECTOR WIRING FOR HYPERION-COMPATIBLE PACKS

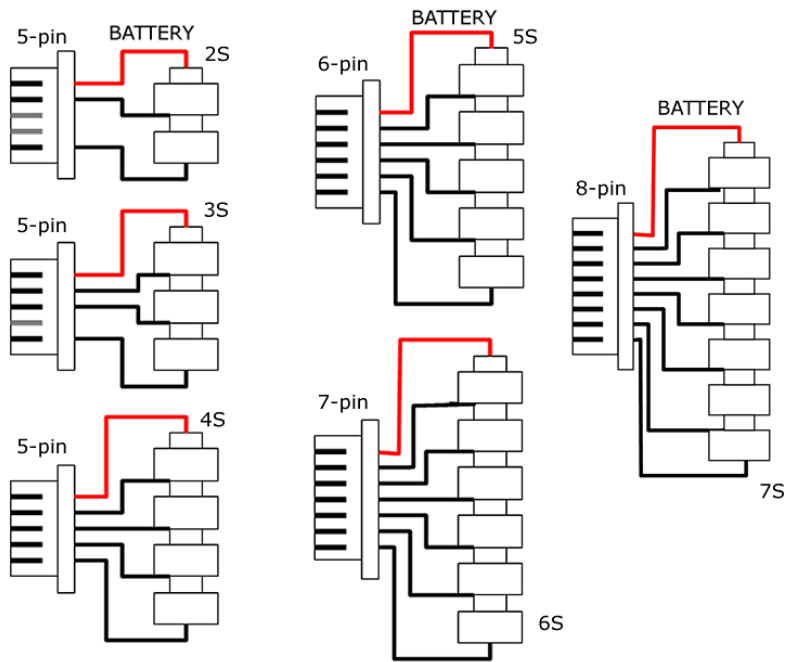

* Note: DUO3 chargers all include Hyperion "HP" multi-adapter. Depending on country of purchase, NET3 may also include an "XH" adapters (HP-EOSLBA-7UXH-B) or EH type (HP-EOSLBA-7UEH-B). If so, be sure to consult the chart to right or your pack maker to determine which adapter should be used with your battery.

DUO3 includes 2x HYPERION compatible Multi-adapters for 2S to 6S packs (#HP-EOSLBA-26HP).* Other brand adapters are available as option parts, HP-EOSLBA-26xx-B as below:
IF YOUR PACK MAKER IS NOT LISTED BELOW, ASK THE MAKER WHICH BRAND BELOW IT MATCHES.

HP-EOSLBA-26XH-B	HP-EOSLBA-26HP-B	HP-EOSLBA-26TP-B	HP-EOSLBA-26EH-B
ALIGN	HYPERION	THUNDER POWER	KOKAM
DUALSKY	POLYQUEST	FLIGHTPOWER-EVO	GRAUPNER
E-FLIGHT	E-TEC	APEX	ROBBE
ELECTRIFLY	POLY RC	VISLERO	NEU
HEXTRONIC	XCITE	DANLIONS	APOGEE
COMMON SENSE V1	MAX AMPS	MPX	VAMPOWER
COMMON SENSE V2	TRUE RC		
ESKY	IMPULSE		
VENOM			
AIR THUNDER			
KONG THUNDER			
GRAYSON POWER			
TENERGY			
DN POWER			
MEGA POWER			
ELECTRIC POWER			
TURBORIX			
ENERGY EC, WOW RC			
IMAX			
FULLY MAX			
FUSION			

TVC MEMORY FUNCTION (terminal voltage control)

The TVC function allows the final CHARGE voltage for LIPO and LIFE battery types to be adjusted for each memory position, with settings of:

- +0mV (default, therefore no change. Lipo=4.200V terminal, LIFE(A123)=3.600V terminal)
- +5mV to +80mV (5mV steps, so LIPO for example terminates at 4.205V~4.280V)
- 5mV to -20mV (5mV steps, so LIPO for example terminates at 4.195V~4.180V)

Uses for TVC FUNCTION:

-5mV to -20mV: Reducing Terminal Voltage should only be done in case MEASURED cell voltage at your battery pack (with quality digital voltmeter) shows Terminal voltage exceeding 4.2V for Lipo (or default 3.6V for LIFE (A123) types). This essentially acts as a calibration function, and should normally be unneeded when using EOS standard, supplied output leads and balance harnesses. However, if you have made your own longer harnesses, the additional length in leads creates the possibility of extra induced resistance, and therefore a reading at the charger lower than is actually found at the battery. This could cause an over-voltage charge. If you find terminal voltage over 4.2V/cell for any cell, reduce TVC setting on each memory position until your MEASURED cell voltages (at battery) are at 4.2V or lower if LIPO, or 3.6V if LIFE.

+5mV to +80mV: Ability to set terminal voltage above defaults is only at the request of competition car, boat, and aircraft users, and only if the race sanctioning body allows terminal voltage for Lipo above 4.2V, or LIFE(A123) above 3.6V.

No LIPO battery maker or seller recommends or allows Terminal Voltage to be set higher than 4.200V, to our knowledge. Hyperion does not recommend or allow G3 Lipo to be Terminal Voltage to be set higher than 4.200V. Therefore any + setting above 0mV VOIDS your WARRANTY for your LIPO battery pack. Whenever ALL cells in a pack exhibit puffing, over-voltage charging is indicated and warranty will not be honored.

WARNING! By setting the TVC to any POSITIVE SETTING above 0mV, you **ACCEPT ALL RESPONSIBILITY** for Damage to your battery, Fire, Injury, and any other Loss which may result. **If you do not agree to accept all risk, DO NOT OPERATE YOUR CHARGER UNLESS ALL MEMORY POSITIONS ARE SET TO DEFAULT 0mV TVC position!** Furthermore, it is your responsibility to insure that no other person uses your charger if TVC is set to greater than +0mV, and to reset ALL memory positions to TVC 0mV default before selling your charger or giving it to others.

Positive settings (+5mV or higher) may be desired by racers looking for competitive advantage, and has been demanded as a feature by racers. However, it is the official position of Hyperion that Competition Sanctioning Bodies are irresponsible in allowing over-voltage changing via their rulebooks, and therefore that both users and their sanctioning bodies are FULLY responsible for any Loss, Damage, or Injury that may occur due to over-voltage charging of batteries. Let's say it again: If you want to use Positive TVC settings, go ahead. But ONLY if you deem it desirable, AND you are taking FULL RESPONSIBILITY for any and all results which may arise. We encourage you to petition your sanctioning body to STOP allowing LIPO terminal voltages in excess of 4.200V.

Note: After confirming CELL COUNT and START for LIPO/LIFE charging, if TVC setting is not default, TVC setting will be shown for a few seconds before the charger begins the charge. Be sure to note the displayed TVC setting at this time, and STOP the charge to reset TVC to default whenever so desired.